

General Purpose Solenoid Valves

For Steam and Hot Water Applications



Parker Jackes-Evans GP Series Solenoid Valves Normally Closed

For Various Applications Including:

- Car Washes
- Commercial Dishwashers
- Hydronic Applications
- Competitive Pricing
- Highest Quality Components
- Replaces ASCO

AIR, WATER, OIL


Maximum Temp. 225°F / 107°C

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP300	70392	1/2"	3.35	3/8" FPT	1-150
GP400	70562	1/2"	3.35	1/2" FPT	1-150
GP600	70712	3/4"	7.40	3/4" FPT	1-150
GP10A	70810	1"	12.20	1" FPT	1-150

STEAM

Maximum Temp. 300°F / 149°C

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP357	70394	1/2"	3.35	3/8" FPT	1-50
GP457	70564	1/2"	3.35	1/2" FPT	1-50
GP657	70714	3/4"	7.40	3/4" FPT	1-50
GP1057	70777	1"	12.20	1" FPT	1-50

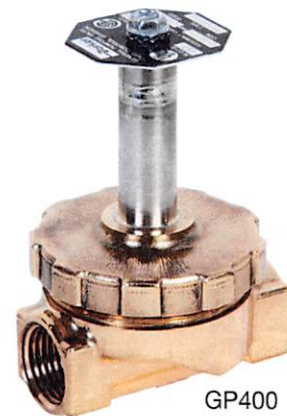

GP400


GP Series Solenoid Coils (Sold Separately)

G23 COILS

Class "F" Molded

Model No.	Part No.	Watts	Volts*	Hz	VA Holding	VA Inrush
G23-24V	77300	9	24 VAC	50/60	12	30
G23-120/240	77360	9	120/240 VAC	50/60	12	30

*G23 coils are available in 12, 24, 120, 208/240, 480, 120/240 VAC and also 12 and 24 VDC. Constructed in accordance with UL, IEEE, and NEMA.

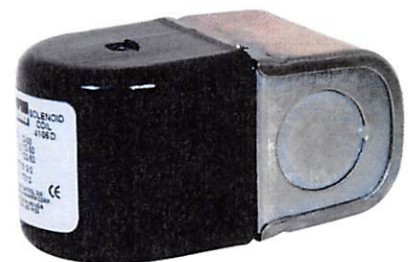

G23 Coil

Contact Information

Parker Hannifin Corporation
Climate and Industrial Controls
Air Conditioning and Refrigeration
Aftermarket Division
2445 South 25th Avenue
Broadview, IL 60155

phone 800 742 2681
fax 800 241 2872
cicaftermarket@parker.com
www.parker.com



ENGINEERING YOUR SUCCESS.

© 2012 Parker Hannifin Corporation, Form P-361 / 042012

GP Series Solenoid Valves (Jackes-Evans)

AIR, WATER, OIL

Maximum Temp. 225°F / 107°C

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP300	70392	1/2"	3.35	3/8" FPT	1 - 150
GP400	70562	1/2"	3.35	1/2" FPT	1 - 150
GP600	70712	3/4"	7.40	3/4" FPT	1 - 150
GP10A	70810	1"	12.2	1" FPT	1 - 150

STEAM

Maximum Temp. 300°F / 149°C

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP357	70394	1/2"	3.35	3/8" FPT	1 - 50
GP457	70564	1/2"	3.35	1/2" FPT	1 - 50
GP657	70714	3/4"	7.40	3/4" FPT	1 - 50
GP1057	70777	1"	12.2	1" FPT	1 - 50



G23 Coils (sold separately)


Model No.	Part No.	Watts	Volts*	Hz
G23-24V	77300	9	24 VAC	50/60
G23-120/240	77360	9	120/240 VAC	50/60

G23 coils for "GP" series are available in 12, 24, 120, 208/240, 480, 120/240 VAC and also 12 and 24 VDC. See catalog for full details and ordering information.

Secondary Coolant (Glycol)

Temp. range: -40°F to 180°F

Model No.	Port Size	Cv	Connections	PSI
10E23C2-R1021E	5/8"	4	5/8" ODF	0 - 150
14E23C2-R1021E	3/4"	5	7/8" ODF	0 - 150
18E23C2-R1021E	3/4"	5	1-1/8" ODF	0 - 150
22EH5C2-R1021E	1"	12.2	1-3/8" ODF	0 - 50
26EH5C2-R1021E	1"	12.2	1-5/8" ODF	0 - 50
34E24C2-R1021E	1-1/2"	22.5	2-1/8" ODF	5 - 125

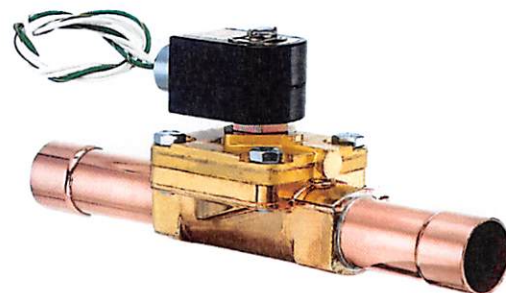

Secondary Coolant valve coils are NEMA 4, 4X (3wire leads)

Power: 11 watts

Voltage available: 24, 120, 208, and 240 VAC.

See Catalog for full details and ordering information.