
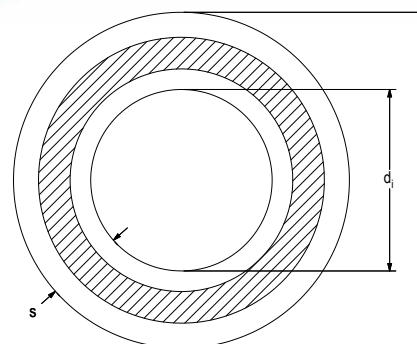


aqualtherm green pipe® SDR 7.4 MF

Material: fusiole® PP-R multi-layer, faser-composite

In accordance with:

- NSF 14, 51 & 61
- CSA-B137.11
- ICC AC 122
- ICC ESR 1613
- ASTM F2389
- CFIA #A508
- NFPA 13D

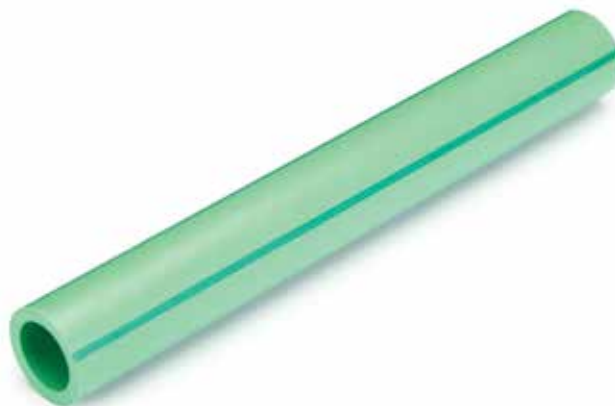

Appearance: Light green with dark green stripe.

NSF system certification: Including fittings, connection pieces, and connection techniques.

Fields of application: For high temperature, moderate pressure systems, particularly domestic hot water systems.

Pipe ^a		Diameter ^b	Wall thickness	Internal diameter	Water capacity	Weight ^c	Weight w/ water
Part no.	Dimension (ND — OD)	d (in)	s (in)	d _i (in)	gal/ft	lb/ft	lb/ft
0670708	½" — 20 mm	0.79	0.11	0.57	0.013	0.11	0.22
0670710	¾" — 25 mm	0.98	0.14	0.71	0.021	0.17	0.34
0670712	1" — 32 mm	1.26	0.17	0.91	0.034	0.27	0.56
0670714	1 ¼" — 40 mm	1.57	0.22	1.14	0.054	0.41	0.84
0670716	1 ½" — 50 mm	1.97	0.27	1.43	0.084	0.64	1.31
0670718	2" — 63 mm	2.48	0.34	1.80	0.134	1.00	2.11
0670720	2 ½" — 75 mm	2.95	0.41	1.79	0.189	1.42	3.00
0670722	3" — 90 mm	3.54	0.48	2.57	0.273	2.04	4.31
0670724	3 ½" — 110 mm	4.33	0.59	3.14	0.407	3.04	7.33
0670726	4" — 125 mm	4.92	0.67	3.57	0.526	4.17	8.55
0670730	6" — 160 mm	6.30	0.86	4.57	0.862	6.55	13.8
0670730x2 ^d	6" — 160 mm (Double Length)	6.30	0.86	4.57	0.862	6.55	13.8
0670734	8" — 200 mm	7.87	1.08	5.72	1.347	10.1	21.3
0670734x2 ^d	8" — 200 mm (Double Length)	7.87	1.08	5.72	1.347	10.1	21.3
0670738	10" — 250 mm	9.84	1.35	7.15	2.105	15.8	33.2
0670738x2 ^d	10" — 250 mm (Double Length)	9.84	1.35	7.15	2.105	15.8	33.2

^a Pipes come in standard 19 ft lengths (5.8 m).

^b To calculate dimensions of the pipe in millimeters, multiply the imperial inches measurement by 25.4.

^c To calculate the weight of the pipe in kg/m, multiply the measurement by 1.5.

^d Pipe comes in 38 ft lengths.